


AUSTRALIAN OWNED

DESIGNED & BUILT

DIRECT CONNECTOR

***Plug your antenna
directly into the TV***

Direct Connector puts an end to:
Corroded/salty/dusty/wet/worn out/loose
and poor outside connections.
Banishes signal-sapping cable joins
and resultant signal loss.
Only one connection instead of five!
Simple to use

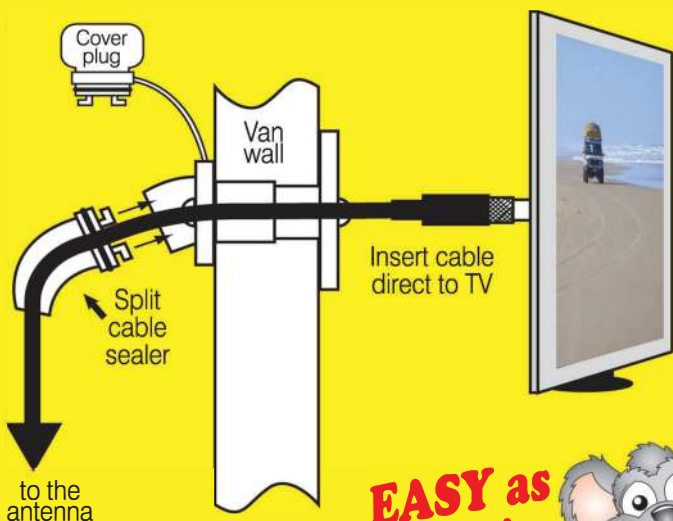

**EASY as
mate!**



0 787099 239244

Fold Away Antennas Caloundra Qld 4551

P: (07) 5492 8083 **E:** sales@foldawayantenna.com.au

www.foldawayantenna.com.au

Easy to install instructions

WARNING: We recommend this product be installed by a licensed electrician because of the electrical risk.


HOWEVER If DIY is your choice:

Step 1: Disconnect 240V mains power from van.

Step 2: Select suitable position near the TV and drill a small hole on the inside wall into the insulation or void.

DO NOT YET PIERCE THE OUTER WALL. Push a piece of stiff wire, inside the hole and "fish" around to check that no power cables are in the way. If all clear, use a 25mm hole saw and drill a hole through the inner wall, letting only the guide bit pierce the outer wall. Go outside and drill the hole back in from outside the van.


Step 3: Assemble the unit as per below.

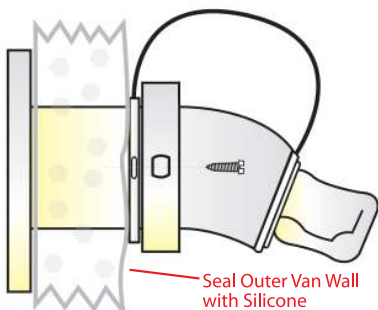

Secure with the self-drilling screws provided. On fibre-glass sided vans, drill small pilot holes to prevent gelcoat cracking. Go outside and slide O-ring over the antenna lead, feed cable through the Direct Connector and plug into TV.

From the outside determine the correct place for the Cable Sealer/Lock (allow some slack in the cable). Fill the 2 sides of the Cable Sealer/Lock with silicone and click together around the cable at the pre-determined place. Remove excess silicone and install O-ring.

Plug into Direct Connector and leave until silicone is dry. Cable Sealer/Lock remains on the antenna cable.



Cable Sealer/Lock